

THOMAS

ATLAS

MADE IN GERMANY. SINCE 1919.



OPERATING WEIGHT	33.3-38 TONS
-------------------------	---------------------

ENGINE POWER	180 KW
---------------------	---------------

REACH	13.5-18.2 M
--------------	--------------------

ATLAS FOR HIGHER EFFICIENCY.

Experience the result of more than 100 years of expertise: a perfected design, attention to detail, and engineered to last. As a competent and highly efficient manufacturer of premium construction machinery in Germany, ATLAS develops loader cranes, excavators and material handlers – **all custom built to exacting specifications**. ATLAS is the machine of choice for the toughest applications and for those who demand uncompromising quality.

**ATLAS POWER OF INNOVATION.
MADE IN GERMANY.**

“For more than a century, our highly motivated employees devote themselves daily without fail to the design and assembly of tailor-made excavators and cranes that serve to increase productivity while simultaneously lowering your total cost of ownership. The proof of our dedication is reflected in working tenaciously every day in order to create innovative solutions. This tradition, which extends over generations, demonstrates our continuous commitment to developing high-quality machines that meet the ever-changing requirements and challenges of our time.”

Brahim Stitou, CEO



FOR
COMP



BUILT RIGHT.

**POWERFUL, ECO-FRIENDLY, VERSATILE, AND EASY TO OPERATE. ATLAS
CONSTRUCTION MACHINERY – MADE IN GERMANY – FOR MORE THAN
100 YEARS.**

// We aim to impress...

Our 100 years of experience has taught us to think big in order to succeed. Our success lies in the combination of productivity, efficiency, and technological supremacy gleaned from carefully listening to our customers. From standard models all the way to custom-engineered designs – we have the best solution for any challenge.

We utilize state-of-the-art ideas and innovative concepts that meet the highest standards in a wide range of applications.

For our Material Handlers the results are impressive: our MH Series Material Handlers produce fast cycle times impressive fuel efficiency, low-noise operation, and a long service life.

OPERATING WEIGHT	33.3-38 TONS
ENGINE POWER	180 KW
REACH	13.5-18.2 M

THAT'S WHAT AN ATLAS IS ALL ABOUT.

HIGHER EFFICIENCY

Perfectly matched components make the powerful engine run at top performance. The ATLAS 350MH features a long service life, low fuel consumption, and impressive performance.

UPTIME – ALL THE TIME

We partner with reputable suppliers to provide high-quality components matched to our demanding specifications – the result is a reliable machine with predictable performance. Our telemetric system provides all relevant data to help companies see what's happening.

WORKING EQUIPMENT FROM IN-HOUSE MANUFACTURING

Our in-house designed attachments allow for greater flexibility and tailored solutions and are built to last.

MAXIMUM STABILITY

Our proprietary welded slewing bearing and slewing ring support matched with a massive 6.5-ton cast iron counterweight provides maximum stability.

UNIQUE UNDERCARRIAGE DESIGN

Our custom undercarriage design combined with a powerful drive motor excels in a variety of conditions.

POWERFUL HYDRAULICS

With the efficient pressure sensitive hydraulics, operators can literally feel the power of our Material Handlers. Our full pilot controls allow effortless changing from demanding tasks at full speed to precision tasks with ease.

OPTIMUM SAFETY

A large cab door and non-slip steps ensure safer access to the cab. LED lighting increases visibility. ROPS and FOPS certified cabs all included to protect your most valuable asset – your people.

A CAB FOR ALL

A spacious cab with the perfect combination of ergonomic controls and operating comfort featuring outstanding visibility for higher safety, air conditioning for clean cool filtered air, as well as an adjustable air ride seat to reduce work fatigue.

USER-FRIENDLY SERVICE

When developing the ATLAS 350MH, we made maintenance easy. Easily accessible components reduce downtime as well as maintenance cost and allow for fast replacement should the need arise. The optional telemetric system provides all relevant data of the machine.

POWERFUL STABILIZER CYLINDERS

The oversized stabilizer cylinders with a piston diameter of 150 mm, feature anti-cavitation and direct mounted stop valves to ensure a secure stand without the need for repressurizing.



POWERFUL, EFFICIENT, FAST, MINIMUM DOWNTIME



FAST CYCLE TIMES AND PRECISE WORKFLOWS

The first thing operators notice is how quick the ATLAS 350MH really is. This comes from a combination of optimized hydraulics and precise control. Thus, the ATLAS 350MH enhances productivity at any recycling yard.



LOW NOISE LEVEL – IN AND OUT

The machine works quietly and is almost vibration-free.



REDUCED TIME TO SERVICE – MORE TIME TO PRODUCE

With easy to access components and an extended maintenance schedule, our machines will not only reduce the time needed for repair but also the COST of that repair.

ELEVATED VIEW THANKS TO ATLAS CAB LIFT



Discover the ultimate view with our hydraulically raising cab. With an impressive height of up to 5.5 meters, ATLAS helps you see more so you can

do more. This increased visibility helps protect the core of the company – its people. WORK SAFE.

A LEADING EDGE IN EVERY DETAIL.

ADMITTEDLY, WE ARE A BIT PROUD: THE ATLAS 350MH IS THE TAILOR-MADE RESPONSE TO CUSTOMER REQUESTS AND FUTURE REQUIREMENTS. THIS MACHINE IS THE RESULT OF MANY YEARS OF PASSIONATE DEVELOPMENT.

Our goal: Besides allowing for increased productivity, a better and superior safety, we aim to create a powerful and agile machine in a compact format that thrives in any environment.

This machine is strong, sensitive, maneuverable, and stable, as well as comfortable and safe. Guided by a commitment to quality and without compromise, we left nothing to chance.



UNOBSTRUCTED VIEW

// Cab with 360° visibility

The large-scale glazing of the cab with a very large front window, undivided side window panes that angle down, and a low-slung rear window ensures that the operator has an unobstructed view of the working environment – from an elevated position with the ATLAS cab lift.



// Rear view camera

Rear and right-side cameras are standard. Add the optional left side camera and you can see it all right from the screen. SAFETY!



// Easy-to-read camera display

A large color camera display with sun shade makes it easy to see in all weather conditions – without unnecessary details.

EASY ACCESS FOR SERVICE



// Easy maintenance

A service-friendly machine design lowers operating costs by allowing for easy access to all the major components. **All service points**, such as measuring points, filter exchange, and cleaning of cooling surfaces, **are readily accessible**.

AUTOMATIC



// Central lubrication points

All necessary lubrication areas are easily accessible as well.

STOWED WELL



// Tools always on board

The standard toolbox allows for storing the right tools at the right place for faster response. If you need more space, there is an optional toolbox offered as well.

FEEL. GOOD. CAB.

WITH ONE OF THE INDUSTRY'S MOST COMFORTABLE WORKPLACES, ATLAS CABS FEATURE 360-DEGREE PANORAMIC VIEWS, EASY-TO-READ GAUGES, ERGONOMIC CONTROLS, LOW NOISE LEVELS, AND EXCELLENT VENTILATION.

The cabs of our material handlers are the envy of the industry.

Special emphasis is placed on clear arrangement, health, comfort, and functionality. With non-slip steps and wide access, our cabs are easy to enter and exit.

The seat is ergonomically designed, made from premium materials, and available in various designs – from the pneumatic suspension and lumbar support to individual adjustments, our seats keep the operator

comfortable. And for those cold days and nights, heated seats are standard.

The comfort doesn't end there. Ranging from the adjustable control panel and the ergonomic joystick, all control levers and switches are within reach. The automatic climate control not only provides for cooling but also ensures warmth in any environment. With our superior filtration system, both the cab and the operator are safe with clean dust-free air. All of this is easily controlled via the display.





**A CAB
DESIGNED
PERFECTLY FOR
EVERYONE.**



// Multifunctional panel

Small, clearly arranged and made for quick access. The optimized design of the push buttons and switches makes our machines easy to operate.



// Air conditioning

Our advanced design provides clean air at the right temperature, and is standard.



// Monitor with side and rear-view camera

The standard monitor ensures maximum safety thanks to a bright screen, in particular when rotating and operating in confined spaces.



// Smartphone tray with USB port

Stay connected and charged while working.



// Non-slip flooring

Our floors contain a special additive to make them slip resistant. They are also easy to clean.



// Comfortable joysticks

With a simple uncluttered design, our joystick moves ergonomically with the seat – and fits any hand. Take your work to a new level of versatility with our optional joystick steering that works without the conventional steering wheel. This innovative option allows you to steer your machine with effortless precision and, at the same time, maximize comfort and user friendliness.



// 2 Bottle holders

Like any modern vehicle, our cabs include space for your drinks to stay safe and hydrated.



// Cooler

The optional integrated cooler with electrical hook-up helps you deal with any environment.



// Stow-away front window

The lower part of the front window can be opened and easily stowed for those times that clear visibility or direct communication is needed for safety.





ENGINE



Deutz
// TCD 6.1 L6 – intelligent and efficient

Since ATLAS was established, we are convinced of the quality of Deutz engines. This is why the water-cooled 6-cylinder inline engine with turbocharging and with charge air-cooling and exhaust after-treatment (EAT) is the key component of the 350MH, too. The powerful Deutz Common-Rail (DCR®) high-pressure injection system and electronic engine control (EMR 5) with smart connection to the drive management ensure highest engine performance at lowest consumption.

// Compliance with emission standards:
EU-stage 5 and US EPA Tier 4 with
DOC / DPF / SCR TIER IV final and the EU-stage 5.

HYDRAULIC SYSTEM



Linde Hydraulics
The hydraulic system ensures quick response times by providing maximum utilization of the available engine performance. At the same time, via LSC management, the hydraulic system made by Linde Hydraulics provides movements independent of the load by means of an electronically controlled pump. This intelligent performance control ensures high flow distribution combined with proportional work functions.

For enhanced efficiency, ATLAS hydraulics feature multiple work modes selectable from inside the cab. For maximum operating performance, a power boost is available as well.

AXLES



KESSLER
The combination of frame, axles and transmission provides the perfect combination of power and enhanced stability, while the robust frame structure ensures higher uptime and a long service life of the machine.

The heavy-duty axle includes a lock for driving across a variety of terrain. The pendulum axle design can be controlled automatically or manually.

ATTACHMENT TOOLS



ATLAS
ATLAS offers a wide range of attachment tools for the most diverse requirements –all designed **by us**.

This provides you with plenty of benefits:

Very wear-resistant – thanks to the use of high-tensile steels and a solid construction.

Maximum efficiency – all attachment tools are specifically designed for your excavator model and will fit perfectly.

Certified – according to the applicable safety standards

Guaranteed – with full warranty coverage and support

Added value – enhanced resale value

It has been proven: The use of high-quality attachment tools can help to reduce fuel consumption and emissions, aiding both production and the environment.

SWING SYSTEM



Thyssen Krupp – Rothe Erde
Thanks to internal gearing and sealed ball bearings, the ball bearing slewing ring from Rothe Erde is an ideal and cost-effective solution.
The design is resistant to major torque fluctuations at all times.

Scan QR code to go directly
to **attachment tools**:



TECHNICAL DATA

ENGINE	
Gross power (ISO 14396)	180 kW
Model	Deutz TCD 6.1 L6 EU Stage V
Type	Turbocharger/intercooling
Displacement	6100 cm³
Number of cylinders	6
Cooling system	water-cooled
Air filter	Dry air filter with integrated pre-separator
Battery	2 x 12 V / 100 Ah
Generator	28 V / 100 A
Starter	24 V / 5.5 kW
Standard Basic equipment	Automatic idling system/ engine stop
	Cold-starting aid
	Diesel pre-filter
	Engine monitoring

HYDRAULIC SYSTEM	
AWE 5 System (Load Sensing)	
Load-limit controlled high-performance pump	
Fuel-efficient flow-on-demand control	
Sensitive, proportional, independent control	
Primary and secondary protection against overload	
Suction valves for all work functions	
Holding valves for lift and articulated cylinders	
Proportional grab and grab rotating function	
Three additional circuits for auxiliary consumers possible	
max. 630 l/min flowrate	
max. 320 bar operating pressure	
Cylinder end position damping	
Operating modes	F1 (Fine)
	F2 (Eco)
	F3 (Power)
Accumulator for emergency lowering of the arm system	

SWING SYSTEM	
Axial piston motor with priority valve	
Planetary transmission	
Automatically controlled multi-disc parking brake	
Two-stage valves	
Slewing torque	99.6 kNm
Upper structure rotation speed	7.5/min

TRAVEL DRIVE + BRAKES	
Variable speed drive motor	
Powershift transmission	
Double-acting brake valve	
Travel direction pre-selection via switch on joystick	
Automotive traveling and cruise control	
Max. speed	20 km/h
Off-road speed	5 km/h
Crawling speed	1 km/h
Traction	110 kN
Gradeability	33 %
Dual-circuit brake system	multi-disc
Parking brake	Spring-loaded brake

UNDERCARRIAGE	
Steering axle with automatic pendulum axle locking	
Additional axle locking via left joystick	
Heavy-duty axles	
Toolbox at undercarriage	
STD tires: Alliance 12.00-20	

VIBRATION EMISSION *	
Hand-arm-vibrations	< 2.5 m/s²
Whole-body vibrations	< 0.5 m/s²
Measurement uncertainty according to standard EN 12096:1997	

*For assessment of hazard exposure acc. to 2002/44/EG, see ISO/TR 25398:2006

DRIVER'S CAB	
Extra-wide access	
Ample legroom	
Radio kit with mute function	
Installation kit for thermoelectric cooler	
Various storage options, document compartment	
Thermal insulating glazing, windows tinted	
Excellent panoramic view	
Bottle holder and cup holder	
Driver's seat	Comfort seat with headrest
	Arm rests and lumbar support
Seat adjustable independent of console	
Air suspended	
Heated	
Horizontal and vertical suspension	
Lumbar support	
Control	Ergonomic joysticks with proportional slide
	Slim steering column with adjustable height and tilt
Switches neatly arranged on the control panel	
Pendulum axle locking on the left joystick	
Monitoring	Operating data indication via display
	Automatic monitoring, warning, and storage
Rear area monitoring camera	
Side-view camera, right-hand side	
Overload warning device, acoustically and visually	
Air-conditioning	automatic climate control
	Excellent air distribution due to optimally arranged nozzles
Refrigerant R134a	
Sound level	ISO 6396 (LpA) inside driver's cab: 71 dB(A)
	2000/14 EG (LwA) ambience level: 100 dB(A)

TIRES (OPTIONAL)	
Solid rubber tires 12.00-20 (x8) Elastic	

REFILL CAPACITIES	
Fuel tank	425 liters
Cooling system	48 liters
Engine oil	15 liters
Hydraulic tank capacity	505 liters
Hydraulic system capacity	970 liters
Ad Blue®	32 liters

OPERATING WEIGHTS*	
LOADING BOOM	STICK
9.45 m (C84.6i)	6.90 m (D84.16i)
Stabilizers 4-fold	36.1 tons
LOADING BOOM	STICK
10.60 m (C84.7i)	7.75 m (D84.17i)
Stabilizers 4-fold	37.4 tons

*Operating weight incl. driver, machine filled, and 1 ton for attachment tools

ATTACHMENT TOOLS (SELECTION)	
Clamshell bucket	Load lifting magnet
Orange peel grab	Log grab
Load hook	Sorting grab



OPTIONS

**IT'S WORTH IT: OUR ATLAS ACCESSORY EQUIPMENT
FOR EXTRA COST-EFFECTIVENESS AND SAFETY.**

FOR MORE EFFICIENCY

- Rotating beacon
- Transmission protection
- Rockfall safety guard
- Hydraulic adapter kit,
Stabilizers can be operated for each axle separately
- Cab elevation
- Bio-oil

DRIVER'S COMFORT

- Proportional control of stabilizers via slider
on joystick
- Synchronous electrical central lubrication system
with monitoring function for upper carriage and boom
equipment
- Joystick steering with and without steering wheel
- 270° camera
- LED working lights
- Driver's seat Premium (Actimo Evolution)
- Electric cooler
- Radio with USB port and Bluetooth
- Buzzer alert for drive mode

**SPECIAL SOLUTIONS
ON REQUEST**

**FOR ADDITIONAL ACCESSORY
EQUIPMENT, SEE PRICE LIST**

WE KEEP YOUR ATLAS MOVING.

**24H SPARE PARTS SERVICE FOR GREATER OPERATIONAL READINESS.
ATLAS SPARE PARTS GMBH DELIVERS IN EUROPE OR WORLDWIDE.
ALWAYS ORIGINAL PARTS. ALWAYS FAST.**


Regular inspections and maintenance of your machines prevent breakdowns and downtime. Exchanging and replacing with ATLAS original parts guarantees quality that pays off for our customers. If there are any problems, ATLAS Spare Parts will deliver the original parts to you in the shortest possible time. With over 50,000 spare parts in the central warehouse in Ganderkesee, ATLAS Spare Parts ensures that your machines are ready for use again more quickly. Anyone who orders a part in Europe usually has it within 24 hours. Whether it is parts for brand new

models or for machines that have been in use for over 40 years: Our experienced teams deliver quickly and worldwide. Over 200 service centers and 80 dealers offer comprehensive support - directly on-site or on the construction site. Trust in the quality, expertise, and availability that only ATLAS Spare Parts can offer.


Scan QR code
to access the spare parts
service:




BASE MACHINE

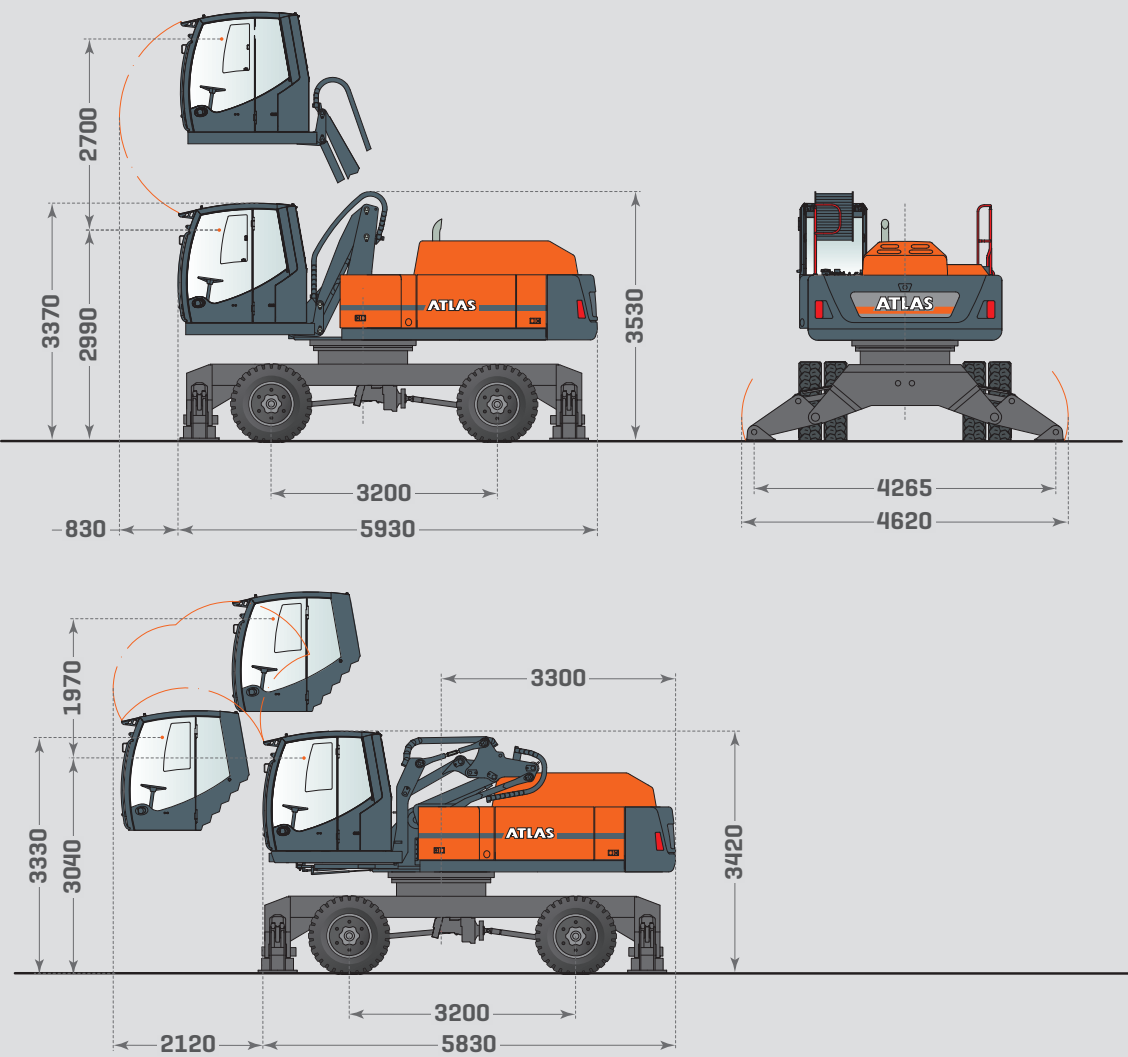


TRANSPORT POSITION

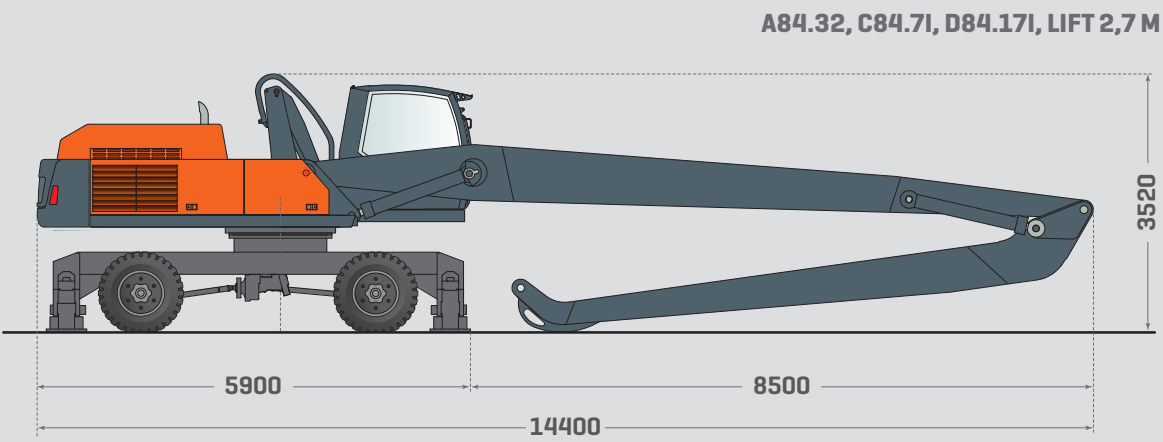


TRANSPORT POSITION

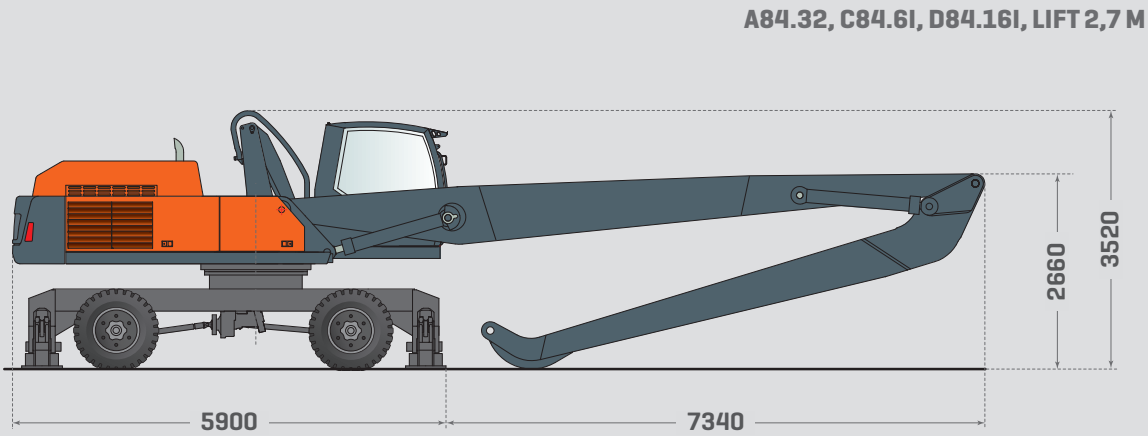

TRANSPORT POSITION

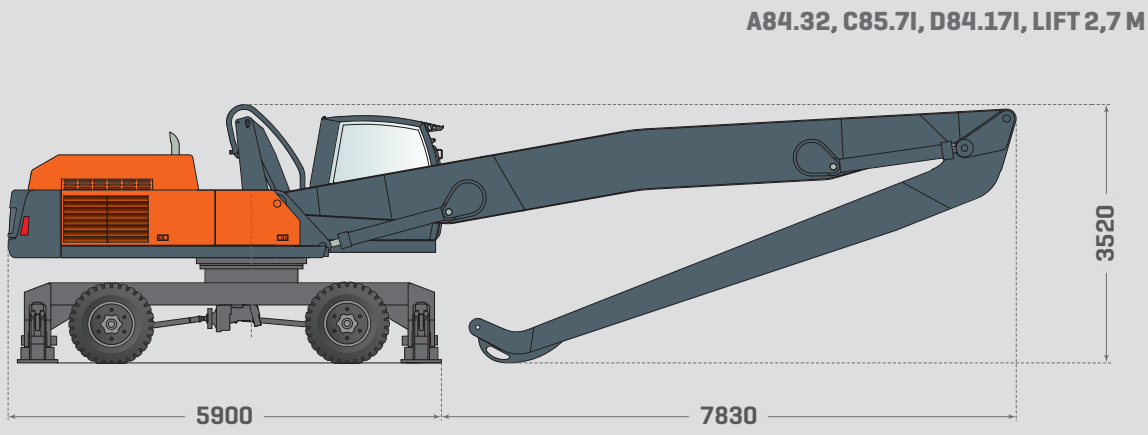


TRANSPORT POSITION

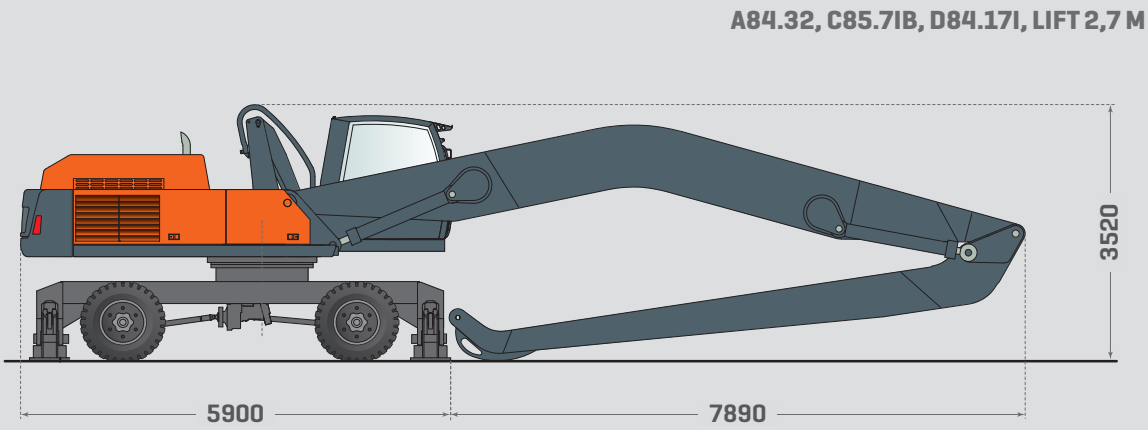

SUPPORTS


A84.32

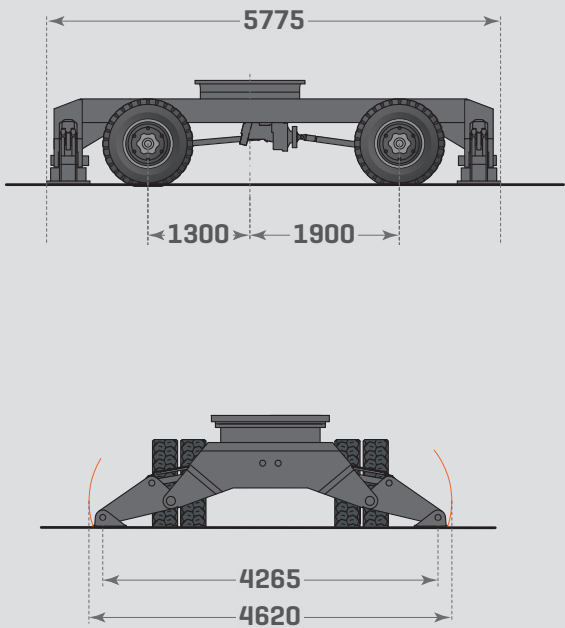

BOOMS & JIBS

BOOMS

C84.3I




C85.7IB




STICKS


D84.13I

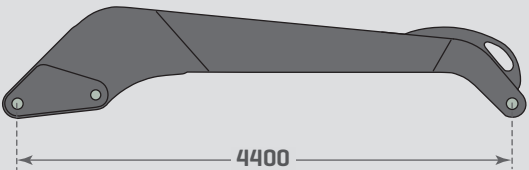

D84.13IS

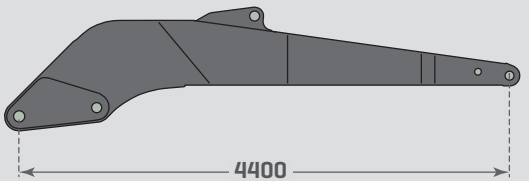


LOAD CAPACITY WITH BOOM C84.6I, ARTICULATED JIB D84.16I

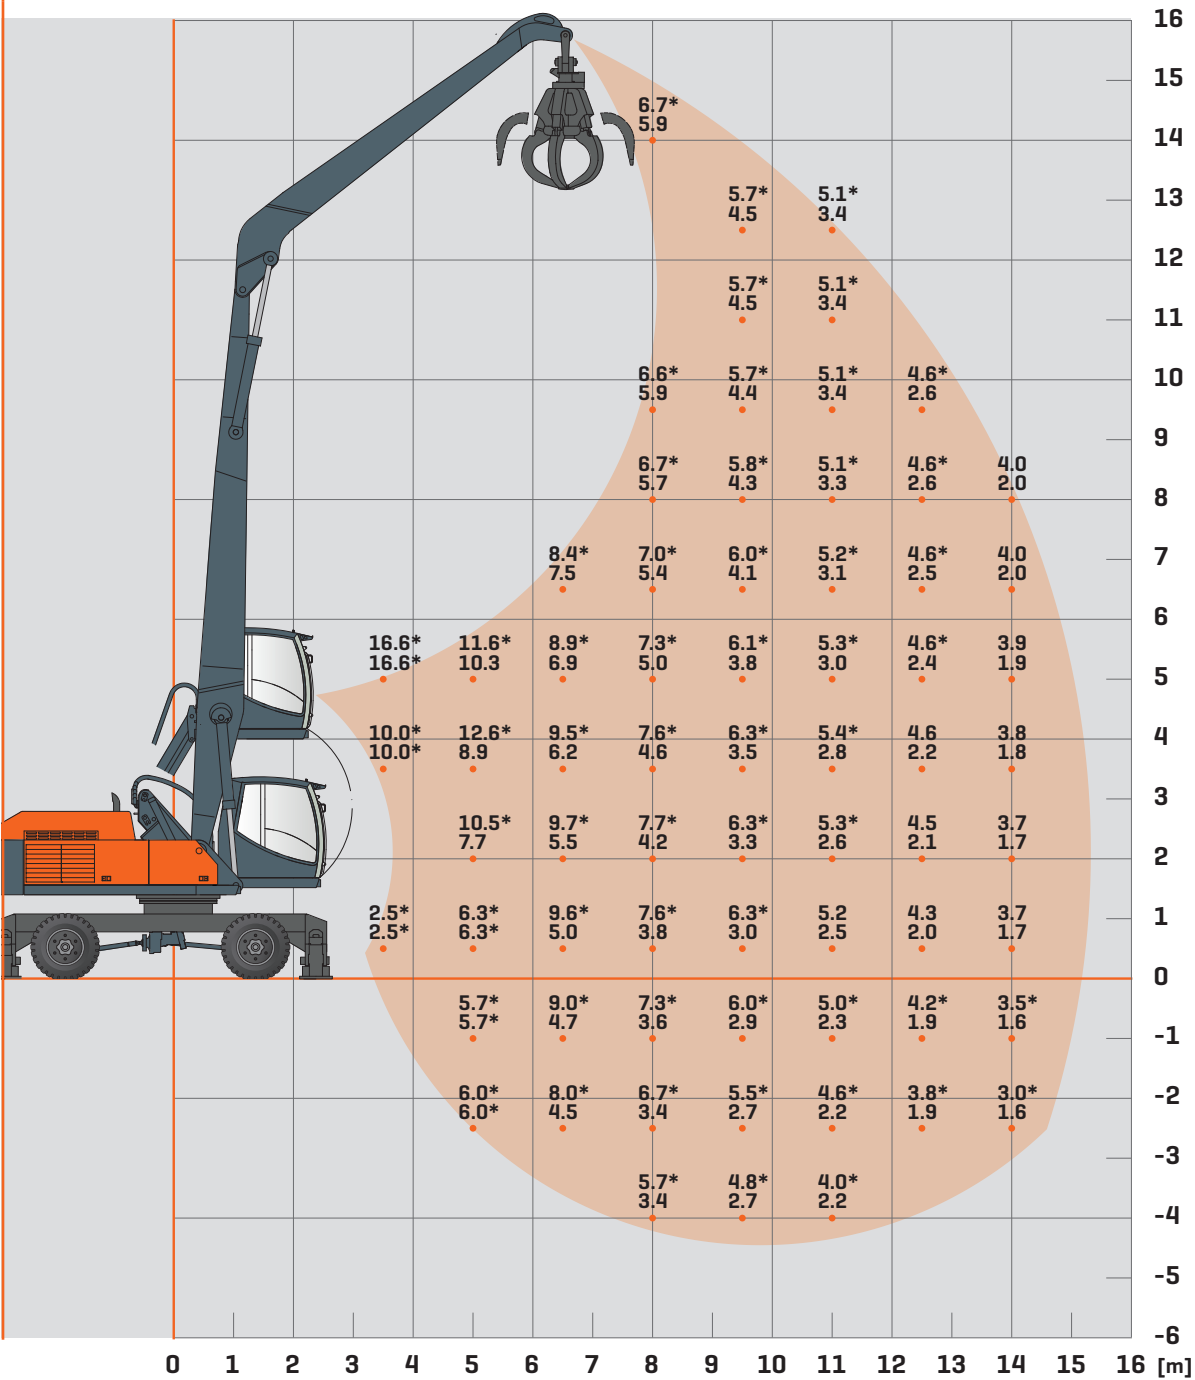


x,x - supported; [x,x] - NOT supported
The indicated maximum load capacities in tons (T) imply a stability of 25% or are calculated at 87% of the maximum hydraulic lifting capacity, according to ISO10567. These values apply at the tip of the arm (without bucket tipping cylinder, system of redirect levers) with optimum positioning of the corresponding arm system and with the pressure switched on. The weights of mounted load-carrying attachments (grab, magnet, load hook, etc.) are to be deducted from the load capacity values. *Limited by stability value.

LOAD CAPACITY WITH BOOM C84.7I, ARTICULATED JIB D84.17I

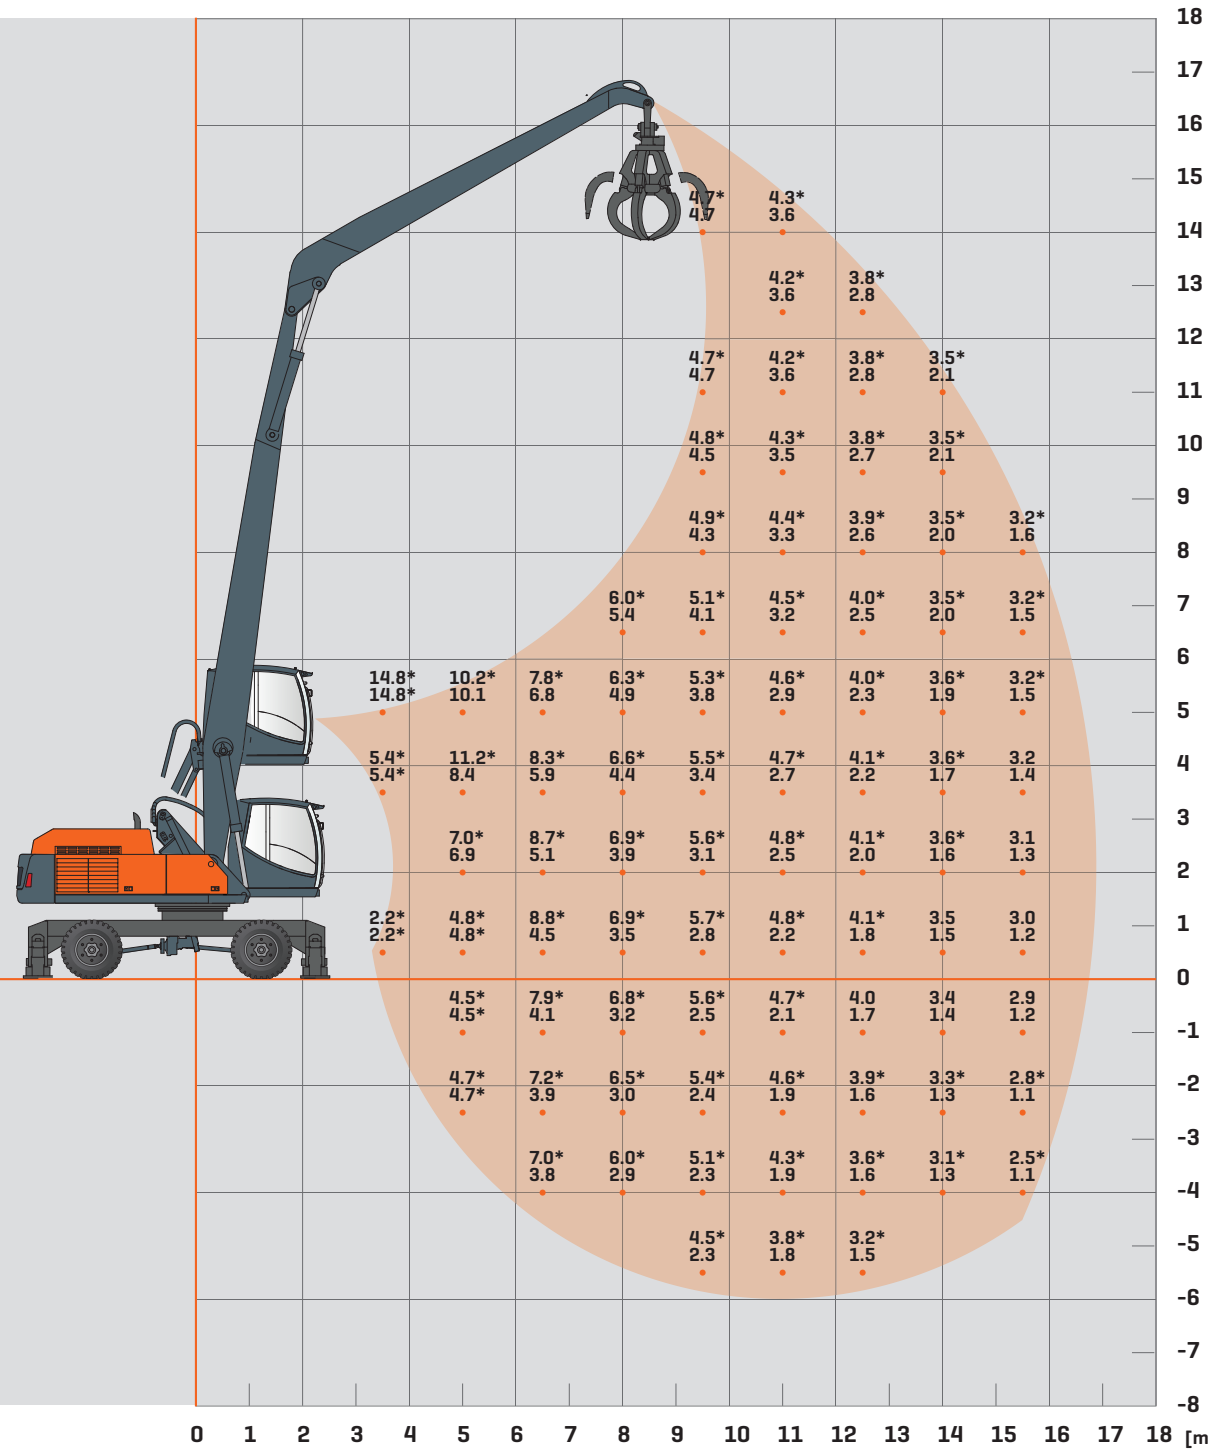


x,x - supported; [x,x] - NOT supported
The indicated maximum load capacities in tons (T) imply a stability of 25% or are calculated at 87% of the maximum hydraulic lifting capacity, according to ISO10567. These values apply at the tip of the arm (without bucket tipping cylinder, system of redirect levers) with optimum positioning of the corresponding arm system and with the pressure switched on. The weights of mounted load-carrying attachments (grab, magnet, load hook, etc.) are to be deducted from the load capacity values. *Limited by stability value.

LOAD CAPACITY WITH BOOM C85.7I, ARTICULATED JIB D84.17I

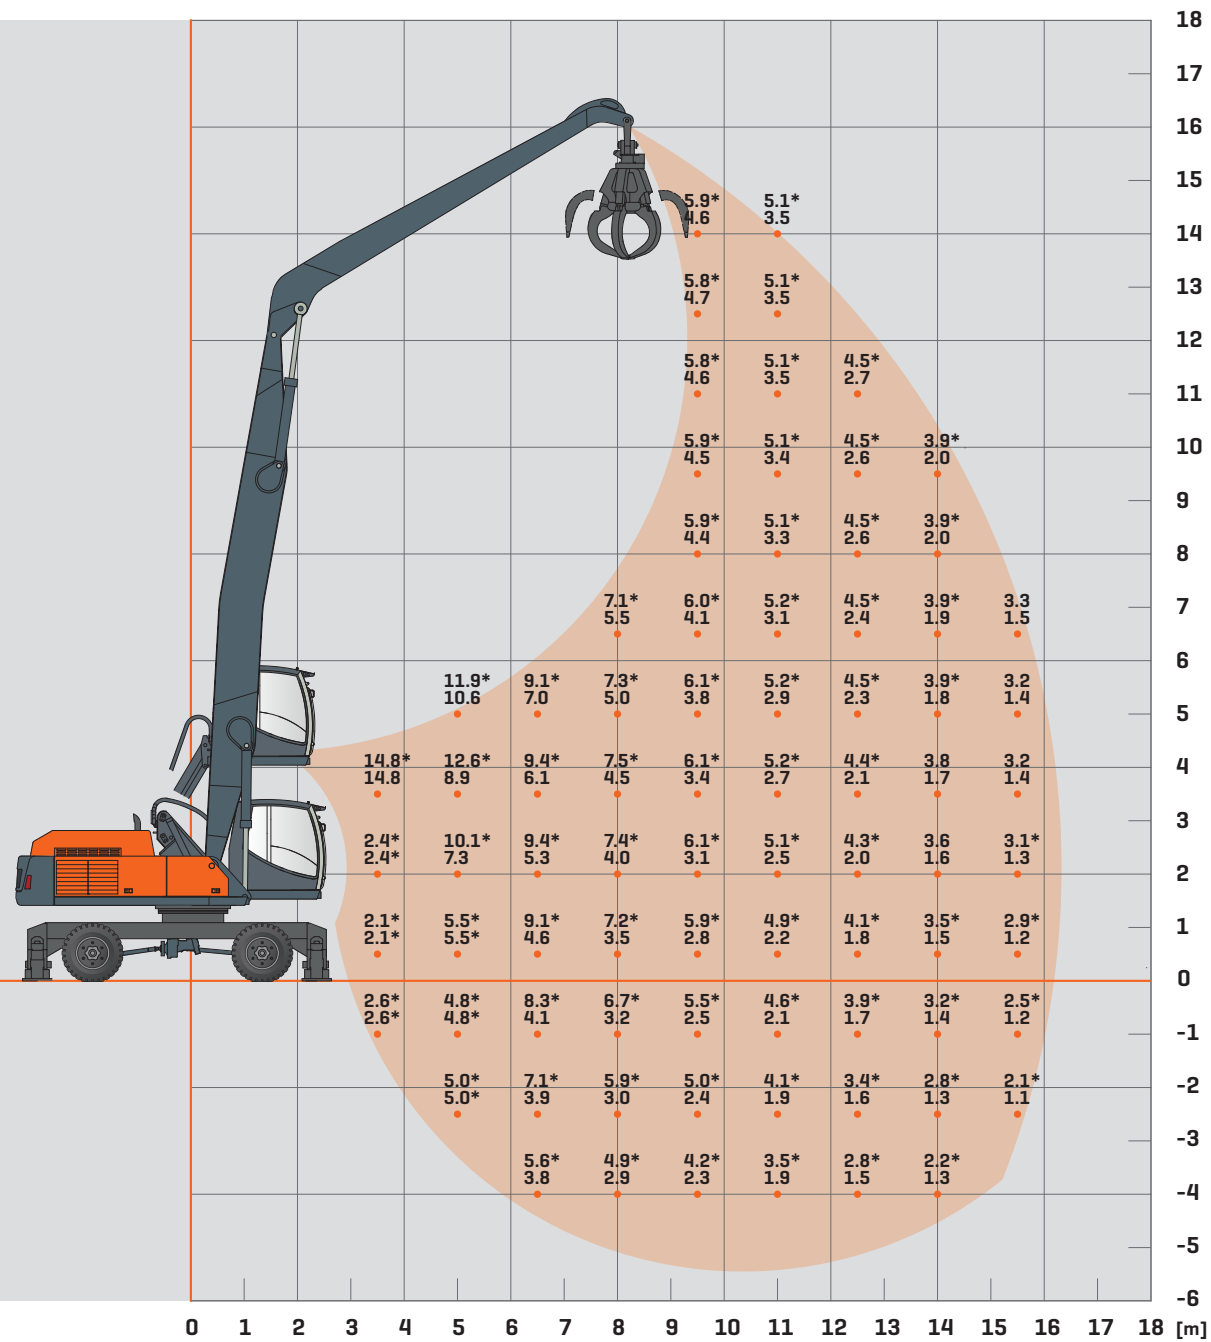

x,x - supported; [x,x] - NOT supported
The indicated maximum load capacities in tons (T) imply a stability of 25% or are calculated at 87% of the maximum hydraulic lifting capacity, according to ISO10567. These values apply at the tip of the arm (without bucket tipping cylinder, system of redirect levers) with optimum positioning of the corresponding arm system and with the pressure switched on. The weights of mounted load-carrying attachments (grab, magnet, load hook, etc.) are to be deducted from the load capacity values. *Limited by stability value.

LOAD CAPACITY WITH BOOM C85.7IB, ARTICULATED JIB D84.17I

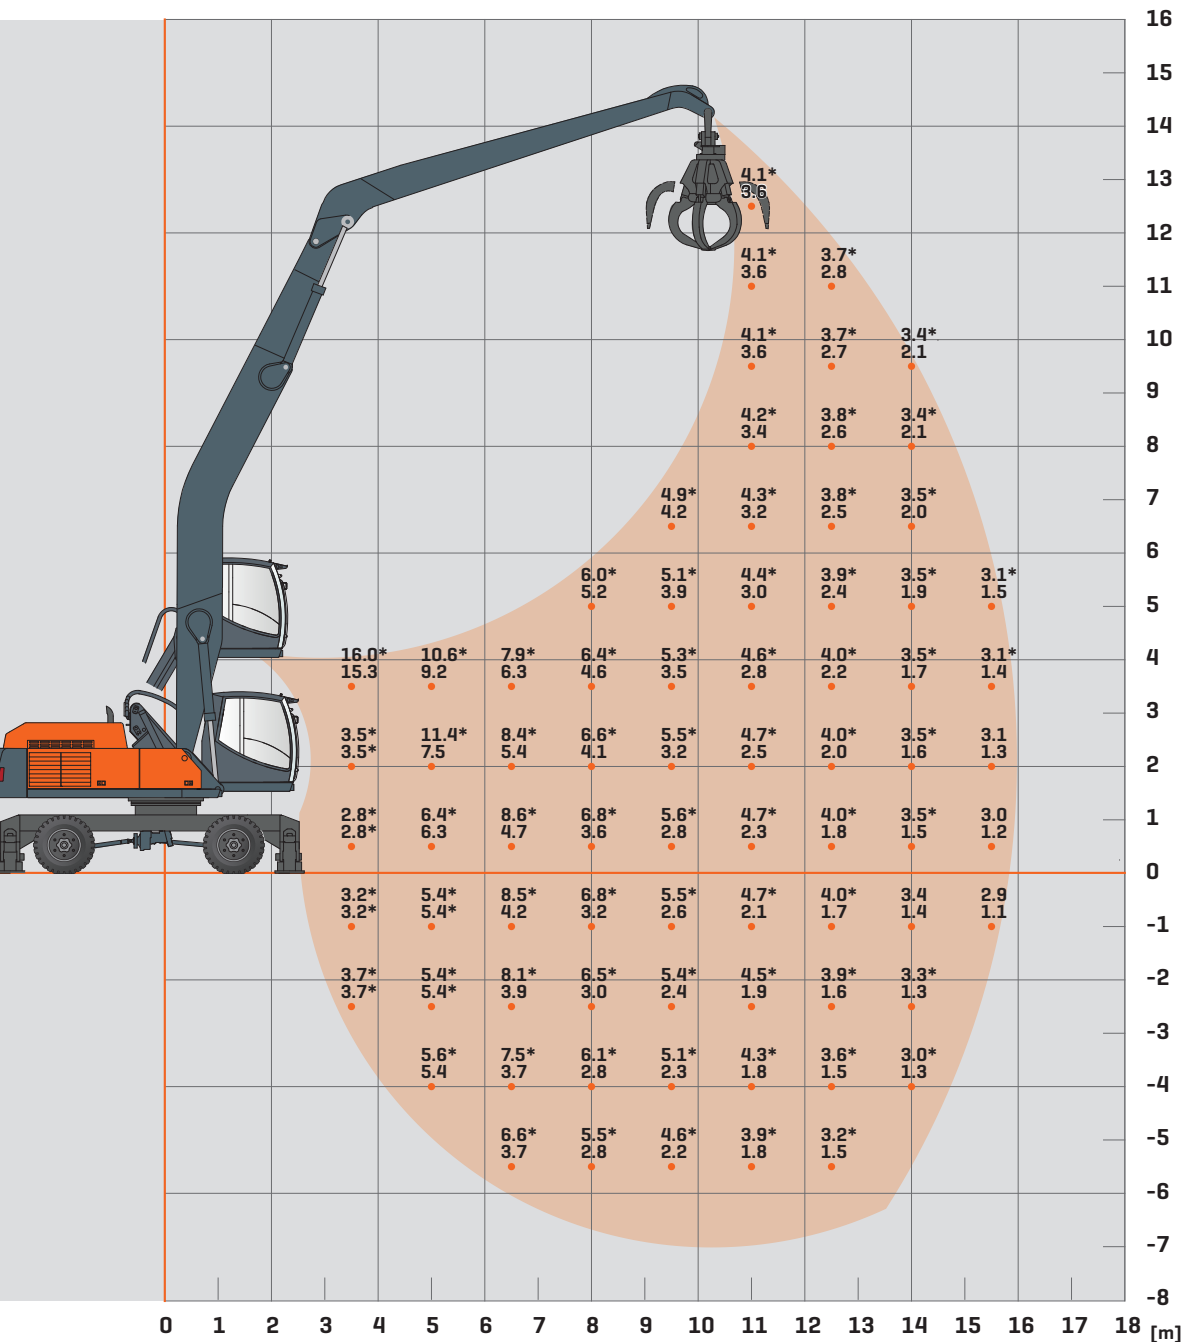

x,x - supported; [x,x] - NOT supported
The indicated maximum load capacities in tons (T) imply a stability of 25% or are calculated at 87% of the maximum hydraulic lifting capacity, according to ISO10567. These values apply at the tip of the arm (without bucket tipping cylinder, system of redirect levers) with optimum positioning of the corresponding arm system and with the pressure switched on. The weights of mounted load-carrying attachments (grab, magnet, load hook, etc.) are to be deducted from the load capacity values. *Limited by stability value.



1919

FOUNDATION

Hinrich Weyhausen founds the company and initially produces agricultural equipment at the Delmenhorst location.

1945

THE FIRST PATENT

The first patent for an ATLAS attachment crane is granted.

1950

FIRST FULLY HYDRAULIC EXCAVATOR

With the first fully hydraulically operated ATLAS excavator, the success story for an entire industry begins.

1956

ATLAS VECHTA

Start-up of the ATLAS factory at Vechta.

1960

ATLAS GANDERKESEE

Start-up of the ATLAS factory at Ganderkesee.

1965

RAIL-ROAD EXCAVATOR

The world's first ATLAS rail-road excavator lays the foundation for a leading position in this market.

1980

ATLAS UK

Start-up of the Bradford, England location for production of ATLAS Cranes. Bradford, England.

1986

ATLAS WHEELED EXCAVATOR 1304

Market launch of the best-selling ATLAS excavator model yet.

2001

CHANGE OF MANAGEMENT

ATLAS is taken over by the American Terex Corporation.

2010

ATLAS MASCHINEN GMBH

The entrepreneur Fil Filipov acquires ATLAS and re-establishes the company as an independent business under the name of "ATLAS Maschinen GmbH".

2012

ATLAS SPARE PARTS GMBH

Foundation of ATLAS Spare Parts GmbH – in order to improve the efficiency of spare parts supply.

2014

NEW MANAGING DIRECTOR

ATLAS expands its product portfolio by tunnel excavators. At the same time, Brahim Stitou is appointed as managing director with sole power of representation of ATLAS Maschinen GmbH.

2015

INNOVATION 3

ATLAS delivers the first electric excavator with many more to follow.

The name of the company is changed from ATLAS Maschinen GmbH to ATLAS GmbH.

2016

ATLAS GROUP SERVICES GMBH

Foundation of ATLAS Group Services GmbH. The groups Training (at the ATLAS-owned center), Service, and Warranty are now pooled in this company.

2017

MINI- AND MIDI-EXCAVATORS

ATLAS expands its product portfolio by mini- and midi-excavators.

2019

100-YEAR ANNIVERSARY

ATLAS proudly looks back on a 100-year history and duly celebrates the centennial.

2020

READY FOR THE FUTURE

ATLAS presents the first battery-powered excavator. The 200 MH accu is used in recycling for Stadtreinigung Hamburg.

Effective immediately, ATLAS machines are equipped with a stage V exhaust after-treatment system.

ATLAS manufactures driver's cabs in-house.

2023

NEW BRAND IDENTITY

ATLAS modernizes its branding, revises the type designations ZW, MH, wheeled, cranes, and enhances its profile in order to be well prepared for the future.


2025

PRODUCT EXPANSION

New: 135WSr wheeled excavator, workman baskets, 450MH material handler, xxx.4 cranes, and much more.

**INNOVATIVE.
PASSIONATE.
PIONEERING.
SINCE 1919.**

OUR STRONG DEALER NETWORK.

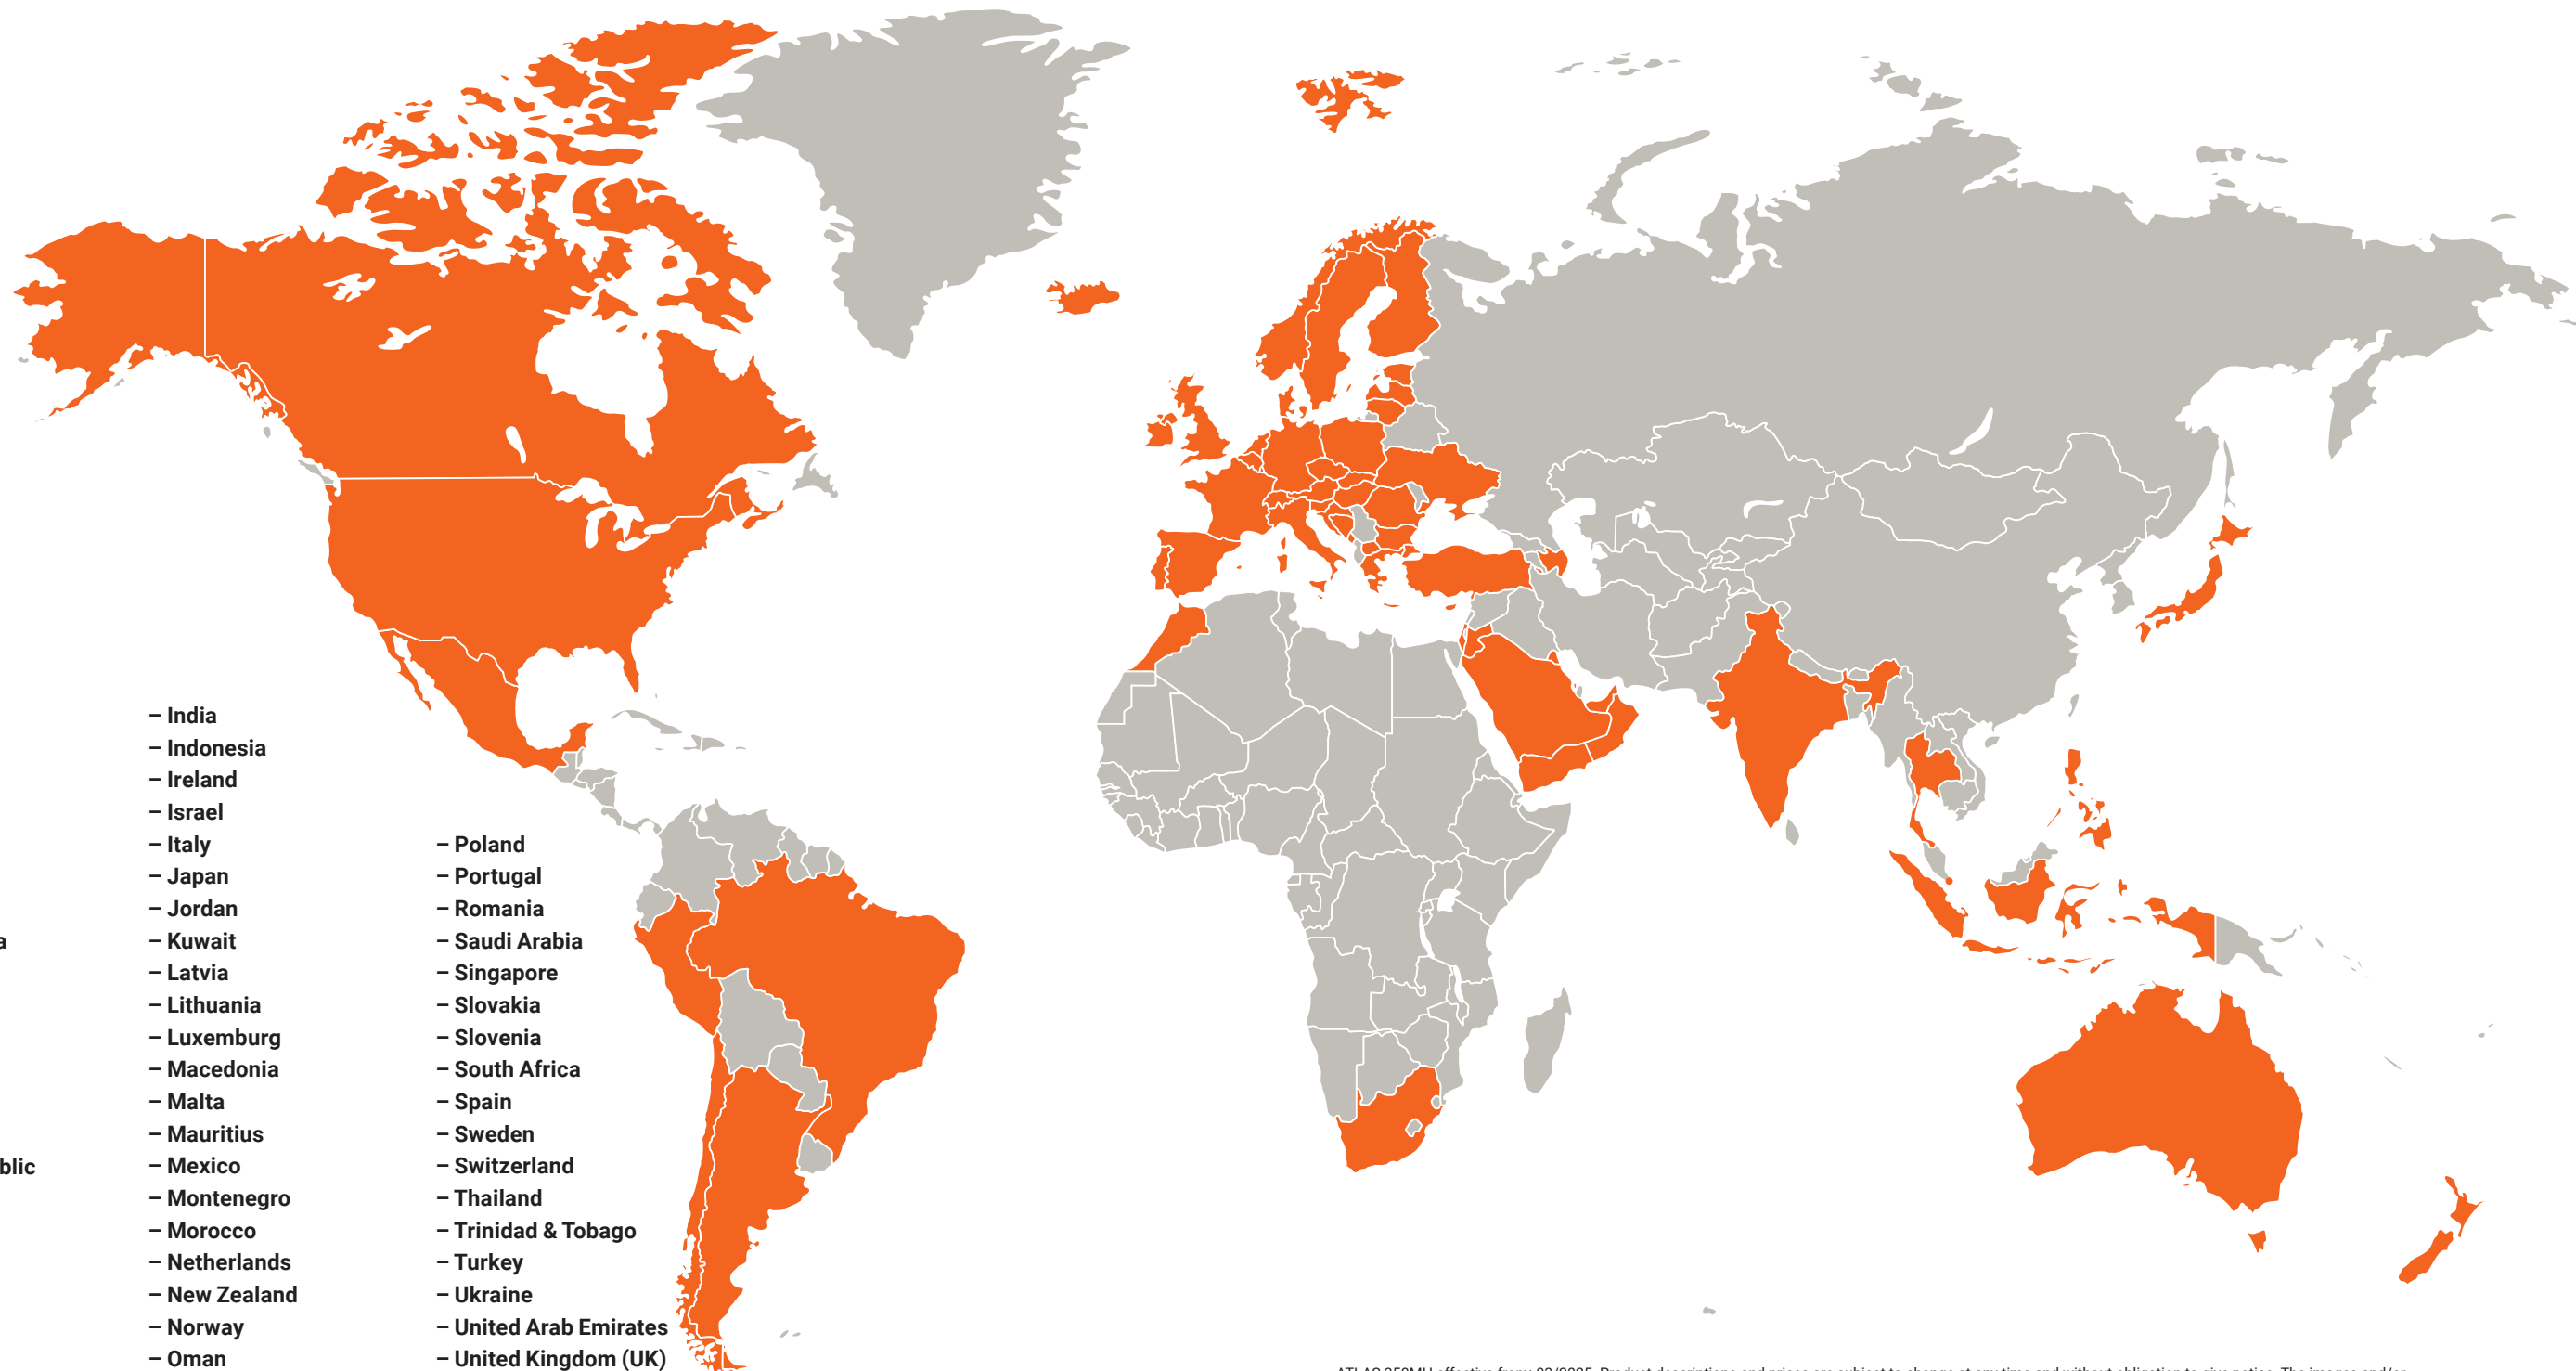

- Argentina
- Australia
- Austria
- Azerbaijan
- Bahrain
- Belgium
- Bosnia and Herzegovina
- Brazil
- Bulgaria
- Canada
- Chile
- Croatia
- Cyprus
- Czech Republic
- Denmark
- Estonia
- Finland
- France
- Germany
- Greece
- Hungary
- Iceland
- India
- Indonesia
- Ireland
- Israel
- Italy
- Japan
- Jordan
- Kuwait
- Latvia
- Lithuania
- Luxemburg
- Macedonia
- Malta
- Mauritius
- Mexico
- Montenegro
- Morocco
- Netherlands
- New Zealand
- Norway
- Oman
- Peru
- Philippines
- Poland
- Portugal
- Romania
- Saudi Arabia
- Singapore
- Slovakia
- Slovenia
- South Africa
- Spain
- Sweden
- Switzerland
- Thailand
- Trinidad & Tobago
- Turkey
- Ukraine
- United Arab Emirates
- United Kingdom (UK)
- USA
- Yemen

ATLAS 350MH effective from: 03/2025. Product descriptions and prices are subject to change at any time and without obligation to give notice. The images and/or drawings contained in this document are for illustrative purposes only and may differ from the standard version of the product. For instructions on proper use of this equipment, please refer to the corresponding operating manual. Failing to observe the operating manual when using our products or other negligent behavior may result in serious personal injury or death. The only warranty applicable to this product is the corresponding standard written warranty. ATLAS does not provide any warranty beyond this, neither explicitly nor implicitly. The designations of the listed products and services may be trademarks, service marks or trade names of ATLAS GmbH and / or their affiliates. All rights reserved. 'ATLAS' is a registered trademark of Atlas GmbH.

Copyright © 2025 ATLAS GmbH.



GANDERKESEE FACTORY

ATLAS GmbH
Atlasstrasse 6
27777 Ganderkesee, Germany
T: +49 (0) 4222 954 0
F: +49 (0) 4222 954 220
info@atlasgmbh.com
www.atlasgmbh.com

VECHTA FACTORY

ATLAS GmbH
Theodor-Heuss-Str. 3
49377 Vechta, Germany
T: +49 (0) 4441 954 0
F: +49 (0) 4441 954 299
info@atlasgmbh.com
www.atlasgmbh.com

DELMENHORST FACTORY

ATLAS GmbH
Stedinger Strasse 324
27751 Delmenhorst, Germany
T: +49 (0) 4221 49 10
F: +49 (0) 4221 491443
info@atlasgmbh.com
www.atlasgmbh.com

UNITED KINGDOM LOCATION

ATLAS Cranes UK Ltd.
National Sales & Service Facility
Wharfedale Road,
Euroway Trading Est.
Bradford, England BD4 6SL
United Kingdom
T: +44 (0) 1274 900900
atlasuk@atlas-cranes.co.uk
www.atlas-cranes.co.uk